

How To Build Our Display Panels

Part List				
Part	Quantity		Description	Price [†]
	panel	legs		
2"x2" lumber, 6 ft	0.1	1.8	For legs and 3"-long leg brackets on frame.	\$2.11 for 8-ft premium white wood [\$4.25]
1"x2" lumber, 10 ft	2	0	For frame. If you were to use 8-foot lumber, you would need at least three pieces instead of two, resulting in much greater waste. If you could find a single ten-foot 1"x4", you could rip (saw along the grain/length) it into 1"x2"s.	\$2.76 for 1"x2" 8-ft common \$6.25 for 1"x4" 10-ft common [\$6.25]
1"x2" lumber, 3 ft	0.9	0	For frame.	[\$1.05]
flat corner ("L") brace	2	0	For top corners of frame (see "Overall" figure). Number of screw holes may vary.	\$1.57 for 5" zinc [\$3.15]
"T" plate	4	0	For connecting 1"x2"s in frame (see "Overall" figure). Number of screw holes may vary.	\$3.47 for 5"x5" zinc [\$13.10]
5/8" #8 flat-head wood screws	28	0	Number depends on number of holes in "T" & "L" braces.	\$1.18 for zinc 12-pack [\$2.80]
1½" #8 flat-head wood screws	4	0	For connecting 3"x1½"x 1½" leg bracket to frame.	\$1.18 for zinc 8-pack [\$0.60]
½" hardware cloth, ≈35"x72"	1 (+1 optional)	0	We only used hardware cloth on one side. If you think you might want to display art on outside of wall, you will probably want hardware cloth on that side also.	\$47.48 for 3'x25' roll (19 gauge) [\$11.40]
shade cloth, ≈37"x74"	2	0	For covering frame and hardware cloth. Found in tan, green, black, and dark brown. Both pieces could be combined into one piece.	<\$30 for 6'x20' roll (price varies with color) [<\$9.00]
staples	225±	0	For attaching shade cloth.	[?]
3½"-long ¼" hex bolt	0	4	For connecting legs and attaching to frame.	74¢ for galvanized [\$3.00]

Part List				
Part	Quantity		Description	Price [†]
	panel	legs		
2"-long ¼" hex bolt	0	2	For attaching legs to frame.	42¢ for galvanized [\$0.85]
¼" flat washers	0	12	Two for each hex bolt.	\$1.18 for 12-pack [\$1.20]
¼" wing nuts (20 threads per inch)	0	6	One for each bolt.	\$1.18 for 4-pack [\$1.80]
pin-on curtain hooks	as needed	0	For hanging art.	\$1.97 for 14-pack [?]

† **Caveat On Price:** The price of a package of the specified item is shown first. Sometimes more than one choice is given. The total price for the number of items needed is in square brackets underneath, based on the most economical choice and prorating the package price when only a partial package is needed. The total price includes the legs but not a second side of hardware cloth. Total price of each item is rounded up to the next nickel.

These prices were found at a Home Depot in Miami in December, 2018. They should only be considered samples. Home Depot was chosen for convenience only; I mean no disrespect to Lowe's or other franchises or any of our local hardware stores, any of which might well have better prices and/or better selection. If an item at Home Depot was out of stock on my visit, I found the price of a substitute.

Prices do not include sales tax. For comparison purposes the total cost, comparing these prices with those of my original 2010 notes, has gone up over 20%.

Building Instructions

Since these detailed instructions were made from my sparse notes years after the project was completed, it is possible I may have forgotten something. Use with caution, and if you do find a mistake, I'd appreciate hearing about it so we can make life easier on the next person tackling this project. Thanks!

1. From the first 10-foot 1"x2", cut a 78" side piece (at a 45° miter cut) and the top 35" piece on the frame with a second 45° miter cut. If you are using 8-foot boards, skip to Step 3.
2. From the second 10-foot 1"x2", cut a 32" cross piece (with normal square (90°) cuts) and the second 78" side piece (at a 45° miter cut). Skip to Step 5.
3. From the first two 8-foot 1"x2"s, cut a 78" side piece (with a 45° miter cut on one end).
4. From the third board, cut one of the 32" cross pieces with a square (90°) cut. Then cut the 35" top piece with two 45° miter cuts.


5. From the last 1"x2" board, cut the remaining 32" cross piece on the frame as above.
6. If you want legs, from each of two 6-foot 2"x2" pieces, cut a 36" leg square, a 3" leg bracket with a square cut, and a 25³/₈" piece with one 45° miter cut. If you don't need or want legs, just cut a couple 3" leg brackets from as small a 2"x2" board as you can find.
7. Assemble, glue, and clamp all of the 1"x2"s. When the glue is dry, add "L" and "T" braces using the 5/8" flat-head screws. I suggest pre-drilling screw holes with a drill bit that is about as wide as the screw shaft (without the threads).
8. Attach each of the 3" leg brackets with two 1¹/₂" flat-head screws. When pre-drilling the holes, remember the holes in the frame should be at least as wide as the screw (including threads) and the holes in the bracket need to be significantly less, as in the previous step.
9. If you want legs, finish the 25³/₈" braces by rounding the bottom end and cutting the notch in the top end. Drill the two bolt holes in that piece, one bolt hole in each of the panel leg brackets, the two bolt holes in the side of the panel frame, and two bolt holes in each of the 36" legs as shown in the "Leg Details" figure.
10. The front of the panel is the side opposite the 3" leg bracket and metal braces. Cut the hardware cloth about 34⁷/₈"x71⁷/₈" (measurements aren't critical here as long as there is enough hardware cloth to staple to the panel and it doesn't poke out beyond the edges). Staple the hardware cloth to the front of the panel. If you think you might want to hang your work on both sides, cut an identical piece of hardware cloth and staple it to the back side of the panel. Keep in mind it is easier to add the second piece of hardware cloth now than it will be later. I didn't list specifications or a price for staples because the size or type is not critical; use whatever fits your stapler, but as long as possible. And don't be stingy on the staples (maybe every inch or so).
11. Staple the shade cloth around the panel frame. Since the shade cloth comes 6 feet wide, it would be easiest to wrap it around both faces of the frame and staple along the edges.

Legs

To use the legs, bolt a 25³/₈" 2x2 brace to a 36" 2x2 leg at the hole at the end of each piece by placing a washer on the 3¹/₂"-long bolt before inserting the bolt through both pieces, and place the other washer and wing nut on to finish. If you place the brace to the right of the leg on the first one, put it to the left on the second (with both pieces oriented the same way in both cases). You may have noticed that in the photograph on our web page that the legs are on the outside of the panel, but in the "Overall" diagram they are on the inside. Either is correct but if you put the legs inside you can place the panels closer together (stability will be only slightly less). Connect the legs to the panel with a two-inch bolt in the upper (notched) end of the brace into the side of the panel and a 3¹/₂"-long bolt through the side of the leg bracket on the bottom of the panel so that the wing nut is on the inside of the panel.

Hang Art

To hang your art, stick the pointy end of the curtain hook (pointing down) through the shade cloth just above a wire in the hidden hardware cloth. For most of our framed images, which use glass, are around 19" by 22" overall, and weigh about five pounds, one hook is fine. Our largest framed piece, which measures about 39" by 31" overall and weighs eighteen pounds, gets two hooks, as do our wider canvases (even though they weigh less). We would also use two hooks if we wanted a piece of art to straddle two panels, placing a hook near the edge of each panel. And you can always use a second hook if wind or other ambient conditions make it more difficult to keep the picture straight during your presentation.

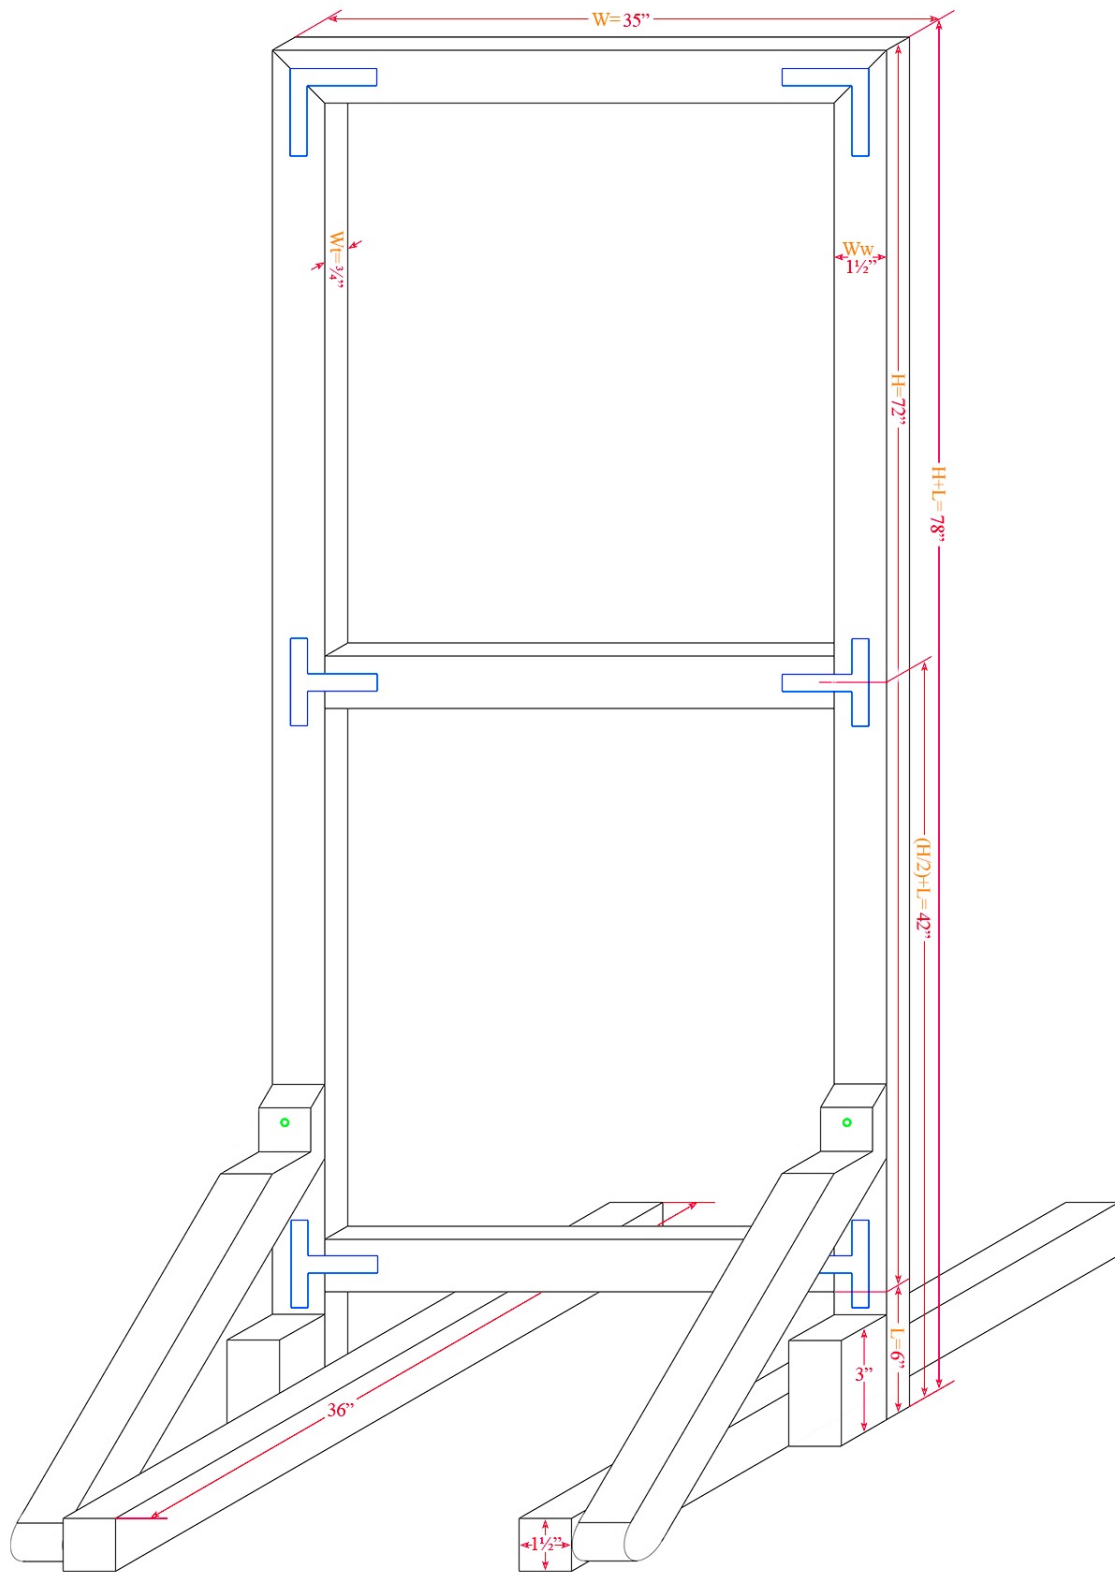

Overall

